

Technical Specifications

General Function: Electrohydraulic, power up/gravity down operation

Operation: Hydraulic pump with two lifting cylinders

Control: hand-held control box

Hydraulic: Pressure Max. 2,988 psi (206 bar), Fluid is Unavis HVI 26, reservoir is .25 gal (1.0 L)

Construction: Steel structure with powder coat finish

Lift Weight: 350 lbs (159 kg)

Lifting Capacity: 800 lbs (363 kg)


Operating Temperature: 19°F to 149°F (-7°C to 65°C)

Power Supply: 12V DC or 24V DC

Current Consumption: Max. 70A (12V), Max. 35A (24V)



Lift Dimensions

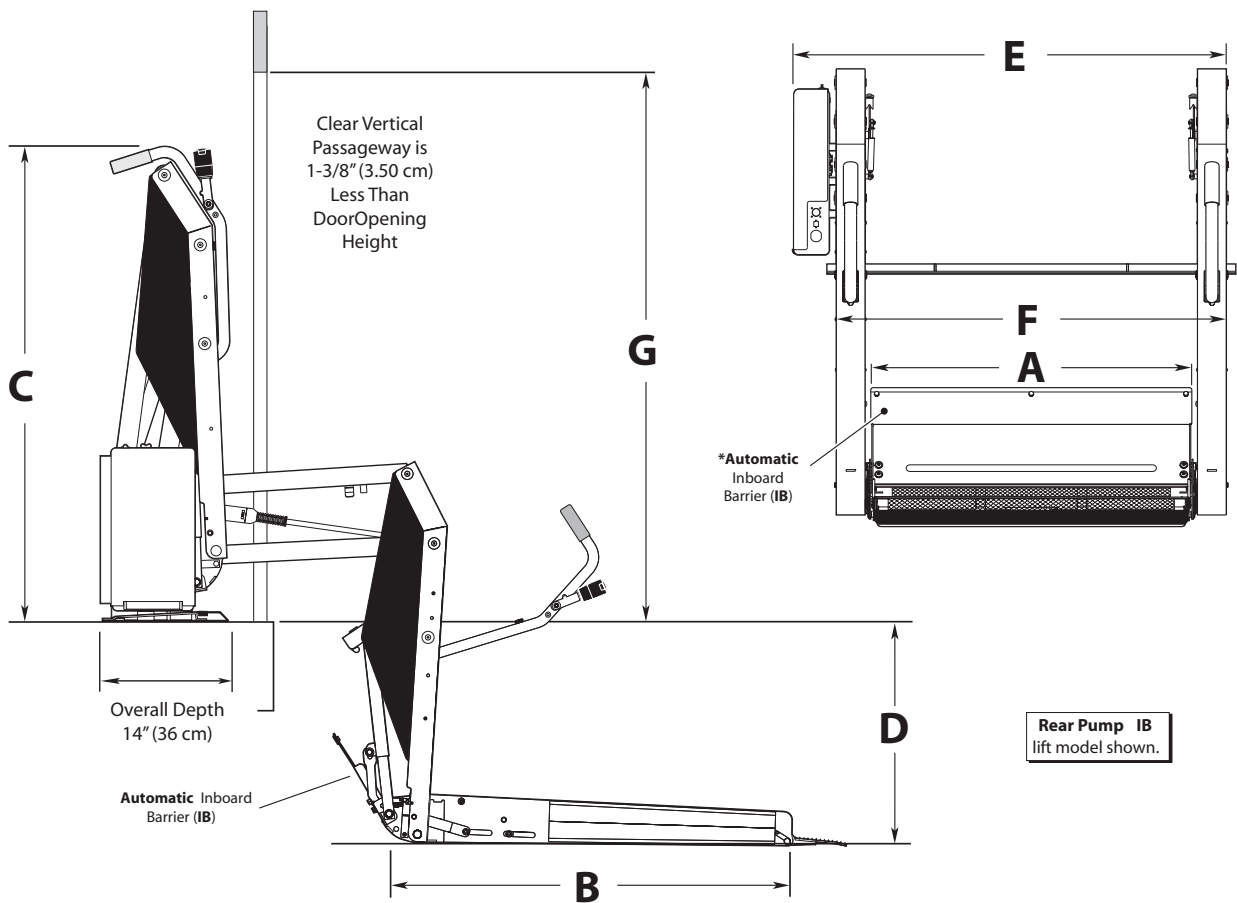

VL917 Vista Series™			A	B	C	D	E	F	G
Lift Model Number	Operation		Clear Platform Width	Clear Platform Length	Overall Lift Height	Max. Floor to Ground	Overall Lift Width	Min. Clear Door Opening Width	Min. Clear Door Opening Height
	User	Attdt.							
VL917IB		X	33"(84cm)	51"(130cm)	55"(140cm)	48"(122cm)	46.5"(118cm)	42"(107cm)	56.75"(144cm)
VL917FIB		X	33"(84cm)	51"(130cm)	55"(140cm)	48"(122cm)	46.5"(118cm)	42"(107cm)	56.75"(144cm)
VL918IB		X	33"(84cm)	48"(122cm)	54"(137cm)	42"(107cm)	46.5"(118cm)	42"(107cm)	55.5"(141cm)
VL918FIB		X	33"(84cm)	48"(122cm)	54"(137cm)	42"(107cm)	46.5"(118cm)	42"(107cm)	55.5"(141cm)

All dimensions are for reference only.

VL917 VISTA SERIES™